

HAS **SKIRTING** FOR MY STYLE AND BUDGET?

HELPS ME ADD A **SCREEN ROOM** TO MY HOME?

CARRIES **A LARGE INVENTORY** OF MOBILE HOME PARTS?

PROVIDES A WIDE SELECTION OF **PATIO COVERS** AND **SHEDS**?

THE ANSWER IS





White



Cameo



Victorian Gray




Sand

- Optional, self-ventilating 13" wide panels with patented interlock design and easy accessibility
- 2-piece top trim system securely holds panels in place
- Solid 13" wide panels with patented interlock design and easy accessibility
- Ground spikes fasten vinyl ground channel in place
- Vinyl ground channel can be shaped to follow the contour of the ground to hold panels securely


## TRUGARD COMPONENT AND REPLACEMENT PARTS

Maintain your investment with premier quality skirting from TruGard


CODE	DESCRIPTION	LENGTH	PACK. DATA	WHITE	CAMEO	VICTORIAN GRAY	SAND
A	15 TLVMS SOLID SKIRTING PANEL (13" EXPOSURE)	12 FT.	15 PC/CTN	0201040	0201057	0200954	0201055
B	15 VENT VENTED SKIRTING PANEL (13" EXP.)	12 FT.	15 PC/CTN	0201028	0201058	0200953	0201054
C	TTF TOP TRIM FRONT	12 FT.	40 PC/CTN	0201020	0201060	0200950	0201051
D	TTM TOP TRIM MOUNTING	12 FT.	40 PC/CTN	0201021	0201059	0200951	0201050
E	VGC VINYL GROUND CHANNEL	12 FT.	40 PC/CTN	0201022	0201061	0200952	0201052
F	SP/NAIL NAIL & SPIKE KIT		128 SPIKES/ 256 NAILS			0201065	
	7" SKIRTING SPIKE		100/BUNDLE			0201070	
	1" HEX HEAD SCREW		500 PER BOX			0263102	
	WINDGUARD	24 IN.	32 PER BUNDLE	0200818			
	POLYCLIP® SKIRTING ATTACHMENTS		50 PER BAG			0201075	




**A. SOLID PANEL**  
(15TLVMS)




**B. VENTED PANEL**  
(15VENT)



**C. TOP TRIM FRONT**  
(TTF)



**D. TOP MOUNT**  
(TTM)



**E. VINYL GROUND CHANNEL**  
(VGC)



**F. GROUND SPIKES & NAILS**  
(SP/NAIL)



# TRUGARD VINYL SKIRT® CARTON INFORMATION

Maintain your investment with quality skirting from TruGard.

CODE	DESCRIPTION	LENGTH	WHITE	CAMEO	VICTORIAN GRAY	SAND
15 TLVMS	PANEL CARTON: 76 LBS./CTN. 15 SKIRTING PANELS PER CARTON; 13 IN. EXPOSURE; 195 SQ. FT. PER CARTON	12 FT.	0201040	0201057	0200954	0201055
15 VENT	VENTILATED* PANEL CARTON: 76 LBS./CTN. 15 PERFORATED SKIRTING PANELS; 13 IN. EXPOSURE; 14.06 SQ. IN. OF FREE AIR SPACE PER LINEAR FT.; 195 SQ. FT. PER CARTON	12 FT.	0201028	0201058	0200953	0201054
14 TKT	TRIM CARTON: 100 LBS./CTN. • 10 PCS. TOP TRIM FRONT; 120 LINEAR FT. • 4 PCS. TOP TRIM FRONT; FACTORY-NOTCHED CORNER; 48 LIN. FT. • 14 PCS. TOP TRIM MOUNTING; 168 LINEAR FT. • 14 PCS. VINYL GROUND CHANNEL; 168 LINEAR FT. • 252 NAILS • 126 7-IN. SPIKES	12 FT. 12 FT. 12 FT. 12 FT.	0201043	0201056	0200955	0201053

\* Ventilation shall be provided for the crawl space at a minimum of one sq. foot of free area for every 150 sq. ft. of the home's floor area. Ventilation openings shall be placed at or near each corner of the home and as high as practicable. Openings shall be located to provide cross ventilation on at least two opposite sides. Where an acceptable ground vapor barrier is installed and one such ventilation opening is within 3 feet of each corner of the home, the total area of ventilation openings may be reduced to one sq. foot for every 1,500 sq. feet of the home's floor area. Where local codes have minimum ventilation requirements for crawl spaces, these requirements shall apply to homes with skirting and continuous foundations.

## MEASURING FOR TRUGARD:

You must first determine the approximate linear feet and average height.

- Determine Linear Feet:** To determine the linear feet of skirting material needed, measure the entire perimeter of the home.
- Determine the Average Height:** To find the average height, measure the height of the space between the ground and the home's bottom edge at each corner and the center of each side. Total all six measurements and divide by 6. Then, add 1 inch.
- Using the Calculation Chart:** Then go to the easy-to-read calculation chart below and find the appropriate measurements. The chart will then tell you what you will need to complete the installation.

PARK MODELS*	TRUGARD CALCULATION CHART FOR SINGLE WIDE / DOUBLE WIDE																			
TYPICAL HOME SIZE (FT.)	8 X 32	8 X 35	12 X 65	12 X 70	14 X 60	14 X 65	14 X 70	14 X 76	14 X 80	16 X 70	16 X 80	24 X 50	24 X 60	24 X 65	24 X 70	28 X 65	28 X 70	28 X 80	32 X 70	32 X 80
LIN. FT.**	80	86	146	156	140	150	160	172	180	164	184	140	160	170	180	178	188	208	196	216
AVG. HT. OF SKIRT	NUMBER OF 12-FOOT PANELS REQUIRED																			
18"	10	10	17	18	17	18	19	20	21	19	21	17	19	20	21	21	22	24	23	25
24"	13	14	23	24	22	24	25	27	28	25	28	22	25	27	28	28	29	32	30	33
28"	16	16	27	29	26	28	30	32	34	30	34	26	30	32	34	33	35	38	36	40
30"	16	17	29	30	27	29	31	34	35	38	42	27	31	33	35	35	43	48	45	50
36"			34	36	33	35	37	40	42	38	42	33	37	40	42	42	43	48	45	50
42"			45	48	44	47	50	53	56	50	57	44	50	53	56	55	58	64	60	66
TRIM PARTS	NUMBER OF 12-FOOT TRIM COMPONENTS REQUIRED																			
VGC	7	8	13	13	12	13	14	15	15	14	16	12	14	15	15	15	16	18	17	18
TTM	7	8	13	13	12	13	14	15	15	14	16	12	14	15	15	15	16	18	17	18
TTF	7	8	13	13	12	13	14	15	15	14	16	12	14	15	15	15	16	18	17	18
SPIKES	60	65	110	117	105	113	120	129	135	123	138	105	120	128	135	134	141	156	147	162
NAILS	120	129	219	234	210	225	240	258	270	246	276	210	240	255	270	267	282	312	294	324

All panels and trim components packaged in 12-ft. lengths—Panels 13-inch wide exposure. Above calculations are exact with no allowance for error in cutting.

\*Park model calculations do not include material needed for tip outs. \*\* Less hitch.



- 16" Wide Panels
- Rich Woodgrain Texture, 5 colors
- Panels .037", Trim .052" thickness.
- U-Shaped Ground Channel
- Homeowner's Warranty
- Vented Panels
- Trim Kits with Hardware
- Factory Notched Front Rail
- Corner Pieces
- 15-Year Warranty on Product & Labor

Due to the printing process, colors shown are only approximations. Your salesman can show you samples with more accurate color.



White



Cameo



Gray



Sand



Pebblestone

## LIFESTYLE COMPONENT & REPLACEMENT PARTS


Lifestyle's center-vent panel is a better solution for your skirting needs:

- Allows you to carry less inventory and makes ordering easier.
- Each full panel = 4.94 sq. inches of net free area per linear foot for 57.63 square inches or 0.4 sq. ft of net free area per panel; Exceeds most manufacturer's requirements\* for open space under homes, meaning less chance of moisture problems & customer complaints.
- Eliminates calculations of how many vent panels are needed.
- Saves time during installation - you don't have to waste time figuring out where to put regular vent panels.

CODE	DESCRIPTION	WHITE	CAMEO	GRAY	SAND	PEBBLESTONE
<b>A LIFCV</b>	CENTER-VENT PANEL CARTON: 12 CENTER-VENT SKIRTING PANELS PER CARTON; EACH PANEL 11' 8" LONG; 16" EXPOSURE; 186.5 SQ. FT./ CARTON; 65 LBS./CTN.	0200597	0200596	0200598	0200599	0200595
<b>B LIF12</b>	PANEL CARTON: 12 SKIRTING PANELS/CARTON EACH PANEL 11' 8" LONG; 16" EXPOSURE; 186.5 SQ. FT./CARTON • 65 LBS./CTN.	0200605	0200590	0200607	0200608	0200606
<b>LIFTKT</b>	TRIM CARTON: 90 LBS./CTN. 10 PCS. TOP TRIM FRONT • 11' 7.25" LONG • 116 LIN. FT. 4 PCS. TOP TRIM FRONT • 11' 7.25" LONG • WITH FACTORY-NOTCHED CORNER • 46.5 LIN. FT. 14 PCS. TOP TRIM MOUNTING • 11' 7.25" LONG. • 162 LIN. FT. 14 PCS. VINYL GROUND CHANNEL • 11' 7.25" LONG • 162 LIN. FT. 200 NAILS, 100 7-IN. GROUND SPIKES	0200600	0200604	0200602	0200603	0200601
<b>C LIFTTM</b>	TOP MOUNT • 40 PER CARTON	0200620	0200624	0200622	0200623	0200621
<b>D LIFTTF</b>	TOP TRIM FRONT • 40 PER CARTON	0200609	0200613	0200611	0200612	0200610
<b>E LIFVGC</b>	GROUND CHANNEL • 40 PER CARTON	0200614	0200618	0200616	0200617	0200615
<b>F</b>	GROUND SPIKE KIT 100 SPIKES, 200 SCREWS			0201066		
	SKIRTING SPIKE 7" • 100/BUNDLE			0201070		
	1" HEX HEAD SCREWS • 500 PER BOX			0263102		
	WINDGUARD • 24" • 32 PER BUNDLE			0200818		
	POLYCLIP • 50 PER BAG			0201075		

\*Ventilation shall be provided for the crawl space at a minimum of one sq. foot of free area for every 150 sq. ft. of the home's floor area. Ventilation openings shall be placed at or near each corner of the home and as high as practicable. Openings shall be located to provide cross ventilation on at least two opposite sides. Where an acceptable ground vapor barrier is installed and one such ventilation opening is within 3 feet of each corner of the home, the total area of ventilation openings may be reduced to one sq. foot for every 1,500 sq. feet of the home's floor area. Where local codes have minimum ventilation requirements for crawl spaces, these requirements shall apply to homes with skirting and continuous foundations.


## LIFESTYLE COMPONENT & REPLACEMENT PARTS



**A. CENTER-VENT PANELS**  
(LIFVENT)




**B. REGULAR PANELS**  
(LIF12)




**C. TOP MOUNT**  
(LIFTTM)



**D. TOP TRIM, FRONT**  
(LIFTTF)



**E. GROUND CHANNEL**  
(LIFVGC)



**F. GROUND SPIKES & SCREWS**  
(SP/NAIL)

## MEASURING FOR LIFESTYLE:

- 1. How to Determine Linear Feet** — To determine the linear feet of skirting material needed, measure the entire perimeter of the home.
- 2. How to Determine the Average Height** — To find the average height, measure the height of the space between the ground and the home's bottom edge at each corner and the center of each side. Total all six measurements and divide by 6. Then, add 1 inch.
- 3. Using the Calculation Chart** — Then go to the easy-to-read calculation chart below and find the appropriate measurements. The chart will then tell you what you will need to complete the installation.

	PARK MODELS		LIFESTYLE CALCULATION CHART FOR SINGLE WIDE / DOUBLE WIDE																	
HOME SIZE (FT.)	8 X 32	8 X 35	12 X 65	12 X 70	14 X 60	14 X 65	14 X 70	14 X 76	14 X 80	16 X 70	16 X 80	24 X 50	24 X 60	24 X 65	24 X 70	28 X 65	28 X 70	28 X 80	32 X 70	32 X 80
LIN. FT.*	80	86	146	156	140	150	160	172	180	164	184	140	160	170	180	178	188	208	196	216
AVG. HT. OF SKIRT	NUMBER OF 11 FOOT - 8 INCH PANELS REQUIRED																			
18"	9	10	16	17	15	16	17	19	19	18	20	15	17	18	19	19	20	23	21	24
23"	10	11	19	20	18	19	20	22	23	21	23	18	20	22	23	23	24	26	25	27
28"	12	13	22	24	21	23	24	26	27	25	28	21	24	26	27	27	28	32	30	33
35"	15	17	28	30	27	29	30	33	34	31	35	27	30	32	34	34	36	39	37	41
42"	20	22	37	39	35	38	40	43	45	41	46	35	40	43	45	45	47	52	49	54
TRIM PARTS	NUMBER OF 11 FOOT - 7-1/4 INCH TRIM COMPONENTS REQUIRED																			
LIFTTM	7	8	13	14	12	13	14	15	16	15	16	13	14	15	16	16	17	18	17	19
LIFTTF	7	8	13	14	12	13	14	15	16	15	16	13	14	15	16	16	17	18	17	19
LIFVGC	7	8	13	14	12	13	14	15	16	15	16	13	14	15	16	16	17	18	17	19
GROUND SPIKES	49	56	91	98	84	91	98	105	112	98	112	91	98	105	112	112	119	130	123	135
SCREWS	98	112	182	196	168	182	196	210	224	196	224	182	196	210	224	224	238	260	245	270

\* Less Hitch & Tip Out



## PANELS

Available in three great colors: Brown, Sandstone and Gray



0201119	32" X 5'	BROWN
0201120	36" X 5'	BROWN
0201121	48" X 5'	BROWN

0201115	32" X 5'	SANDSTONE
0201116	36" X 5'	SANDSTONE
0201117	48" X 5'	SANDSTONE

0201122	32" X 5'	GRAY
0201123	36" X 5'	GRAY
0201124	48" X 5'	GRAY

## K-ROCK CALCULATION CHART

MOBILE HOME SIZE	14	14	14	14	14	14	14	14	14	16	24	24	24	24	24	24	28	28	28	28	28	
	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	46	50	52	56	60	65	70	72	80	85	44	50	60	64	65	70	44	52	60	64	70	
LINEAR FT. (LESS HITCH)	112	120	124	132	140	150	160	164	180	194	128	140	160	168	170	180	136	152	168	176	188	
NUMBER OF PANELS	24	26	27	28	30	32	34	35	38	41	27	30	34	36	36	38	29	32	36	38	40	


## ACCESS DOORS

Ships with keys stapled to rear of door.



Total Dimensions: 32" x 36"  
Door Dimensions: 28.5" x 33"

6" clearance below door



0201126	32"W X 36"H	BROWN
0201127	32"W X 36"H	GRAY
0201111	32"W X 36"H	SANDSTONE
0201131	32"W X 36"H	WHITE

## TONGUE COVER

0201141 GRAY



## SCREWS

Sheet metal screws, 1-1/4" hex washer head, painted. Zinc plated. #8 gauge.

0262611	BLACK	250/BOX
0262612	BLACK	500/BOX
0262632	CREAM	500/BOX



## METAL TOP TRIM, 10'

0201132	BROWN
0201133	GRAY
0201134	SANDSTONE




## METAL CORNERS, 36"

0201145	BROWN
0201146	GRAY
0201147	SANDSTONE



## METAL BOTTOM TRACK & FROST HEAVE CHANNEL



Bottom track shown

ITEM #	STANDARD TRACK, 10'
0201128	BROWN TRACK
0201129	GRAY TRACK
0201130	SANDSTONE TRACK



  

ITEM #	FROST HEAVE TRACK, 10'
0201150	BROWN CHANNEL
0201151	GRAY CHANNEL
0201152	SANDSTONE CHANNEL



## VENTS

Provides 72 sq in. of air flow

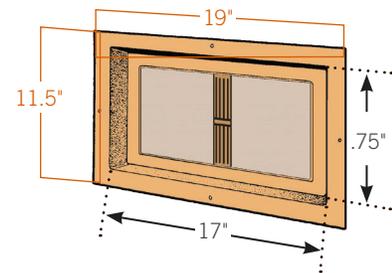


NOTE: To determine the number of vents: square footage divided by 150 = number of vents needed.

ITEM #	UNIVERSAL VENT
0201125	BLACK
0201137	BLACK DELUXE - W/DAMPER
0201108	SAND



## SKIRTING PANELS




0201205	32" X 5'	GRAY	0201204	32" X 5'	BROWN
0201203	36" X 5'	GRAY	0201202	36" X 5'	BROWN
0201201	48" X 5'	GRAY	0201200	48" X 5'	BROWN

## ACCESS DOORS

Ships with keys stapled to rear of door.

Total Dimensions: 32" x 36"  
Door Dimensions: 28.5" x 33"  
6" clearance below door

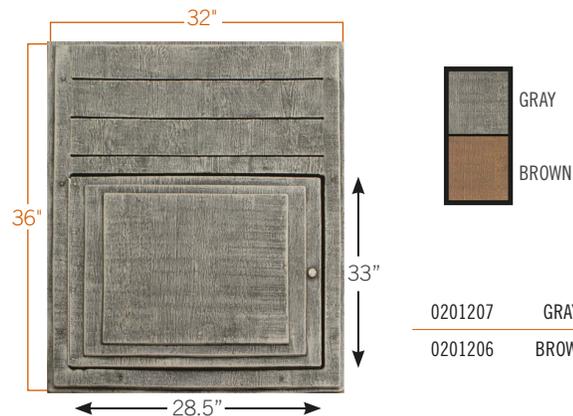

0201207	GRAY
0201206	BROWN




Exteria products are made with extremely durable, easy to clean polypropylene.

Not Available At All Locations


**PANELS**

**Hand-Cut Stone**

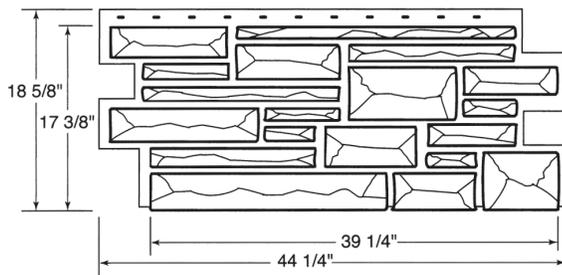


Carton weight: 10 lbs.; 10/Ctn.  
Approx. linear ft. per carton: 26.75

**Hand-Laid Brick**

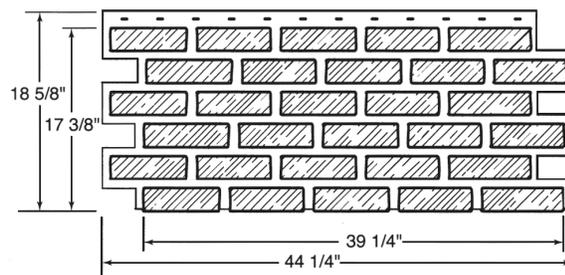

Carton weight: 12 lbs.; 10/Ctn.  
Approx. linear ft. per carton: 30

**LEDGE**



Carton weight: 12 lbs.; 10/Ctn.  
Approx. linear ft. per carton: 30

**UNIVERSAL STARTER STRIP**


Galvanized Steel  
Length: 10'  
Linear Feet: 250  
Carton weight: 39 lbs.; 25/Ctn.




Carton weight: 39 lbs.  
Approx. linear ft. per carton: 30

0200455

**CORNERS (90° Outside Corner)**



Carton weight: 11 lbs.;  
10/Ctn; Lin. Ft./Ctn.: 15




Carton weight: 10 lbs.;  
10/Ctn; Lin. Ft./Ctn.: 15

**MORTAR FILL CAULK**

Cement gray caulk matches "mortar." Average job generally requires two tubes. Siliconized acrylic sealant repairs cracks in brick, mortar and any other cementitious surface. Mortar Seal is a flexible, weather resistant material that cures to a cement-like color. Can be cleaned with soap and water.



0200480 12/CTN; CARTON WEIGHT: 17 LBS.; COLOR: MORTAR LINE GRAY

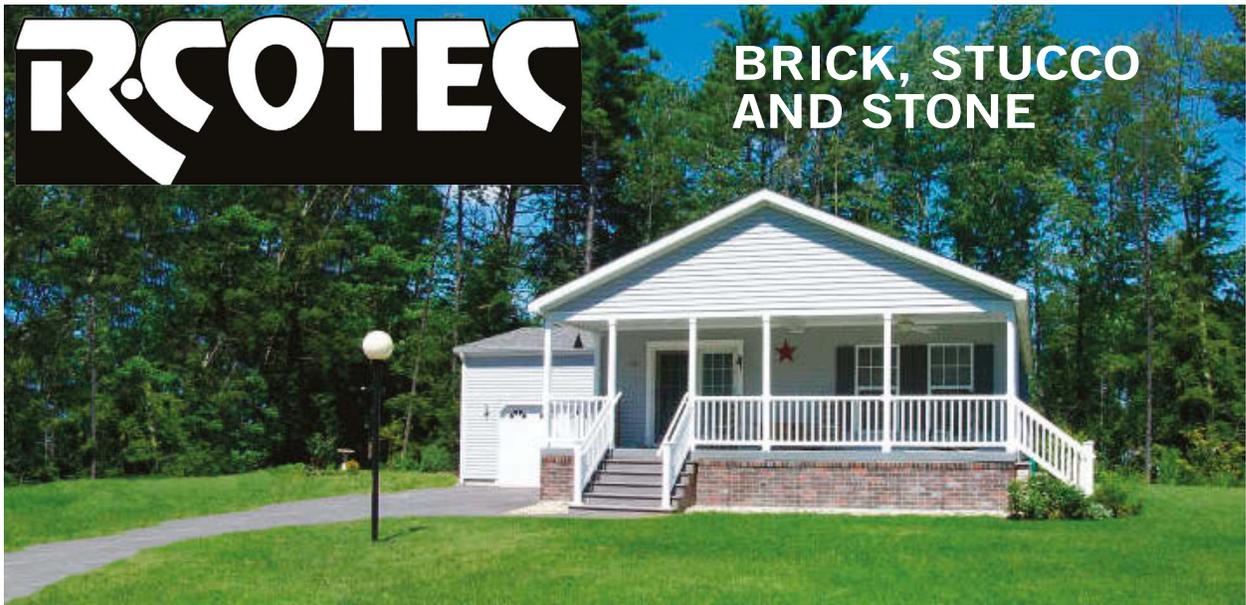

- Attractive, durable textured finishes
- 1-1/8" EPS foam panels are coated with SpaceGuard, a Class "A" fire rated masonry coating, installed with a self-supporting matching steel framework.
- Any home looks custom built
- Insulating: R-5 value
- Light weight
- Blow-out resistant
- Maintenance free
- Field and lab tested



Gray Brick



Brown Brick



Gray Stone



Red Brick

## AUTOMATIC FOUNDATION VENTS

### SAVES ENERGY!

- Automatically opens at 70°, closes at 40°
- Bi-metal coil fully enclosed in patented protection
- High-density thermo plastic construction
- Stainless steel and corrosion resistant metal parts
- Heavy-duty aluminum mesh screen in front and back
- Fits standard 8" x 16" vent openings
- Limited lifetime warranty
- 65 sq. in. net free area



Gray Stucco



Brown Stone

0421280 BLACK 0421281 GRAY  
0421282 BROWN 0421283 WHITE

Colors are only representative and not actual.



RED BRICK	STEPS	24"	30"	36"	48"
48"WX 1-1/8" THICK PANELS					
ACCESS PANEL POST 2/BX		0202130	0202131	0202132	0202014
CORNER PLATE		0202009	0202010	0202011	0202012
EXPANSION CHANNEL					
JOINING AND SUPPORT CHANNEL		0202005	0202006	0202007	0202008
BROWN BRICK	STEPS	24"	30"	36"	48"
48"WX 1-1/8" THICK PANELS			0202051		0202053
ACCESS PANEL POST 2/BX			0202045		0202064
CORNER PLATE			0202060		0202066
EXPANSION CHANNEL					0202054
JOINING AND SUPPORT CHANNEL			0202056		0202059
4 STEP	0350350				
5 STEP	0350351				
GRAY BRICK	STEPS	24"	30"	36"	48"
48"WX 1-1/8" THICK PANELS				0202160	0202073
ACCESS PANEL POST 2/BX				0202163	0202084
CORNER PLATE				0202162	0202080
EXPANSION CHANNEL					0202074
JOINING AND SUPPORT CHANNEL				0202161	0202077
GRAY STUCCO	STEPS	24"	30"	36"	48"
48"WX 1-1/8" THICK PANELS		0202015	0202016	0202017	0202018
ACCESS PANEL POST 2/BX		0202047	0202048	0202137	0202028
CORNER PLATE		0202023	0202024	0202025	0202026
EXPANSION CHANNEL					0202019
JOINING AND SUPPORT CHANNEL		0202020	0202021	0202022	
4 STEP	0350360				
5 STEP	0350361				
GRAY STONE	STEPS	24"	30"	36"	48"
48"WX 1-1/8" THICK PANELS		0202029	0202030	0202031	0202032
ACCESS PANEL POST 2/BX		0202140	0202044	0202141	0202042
CORNER PLATE		0202037	0202038	0202039	0202040
EXPANSION CHANNEL					0202033
JOINING AND SUPPORT CHANNEL		0202034	0202035	0202036	0202070
4 STEP	0350355				
5 STEP	0350356				
BROWN STONE	STEPS	24"	30"	36"	48"
48"WX 1-1/8" THICK PANELS					0202150
ACCESS PANEL POST 2/BX					0202154
CORNER PLATE					0202153
EXPANSION CHANNEL					0202151
JOINING AND SUPPORT CHANNEL					0202152



**CertainTeed**

The look of textured stucco with the ease of skirting panels

## CERTAINTEED FIBER CEMENT SKIRTING SYSTEM

CertainTeed Outperforms the Competition!

**Exclusive DuraPress®** embossing ensures product thickness consistency and authentic grains and textures, panel to panel, lot to lot.

**Superior resistance to damaging moisture** – no delamination ever. 60% higher interlaminar bond strength versus the competition means no delamination guaranteed!

**Proven highest durability.** Fracture/brittleness tests prove it.

**CertainTeed's exclusive precure chamber stops chalking.**

**FiberTect™ Sealant saves money** because it penetrates into and bonds with Fiber Cement. Once the board is sealed, it requires 15% less paint than competitive panels.

**The longest paint "window" means greatest job site flexibility** – 24 months before a finish must be applied – versus just the six months allowed by competitive siding manufacturers.

**Excellent safety from fire and wood-boring insects.** Class 1 (A) fire rating and are impervious to wood-boring insects like termites.

**Peace of mind with a solid warranty.** 50-year limited transferable warranty. And with CertainTeed's exclusive SureStart warranty protection, 100% of material and labors are covered during the SureStart period. (50-year warranty applies only if the product is installed according to installation instructions.)

### CertainTeed Skirting Parts

- 0200407 PANEL 4' X 8'
- 0202165 WHITE GRD CHANNEL BTM RAIL
- 0200401 GRD CHANNEL, GRAY
- 0200406 H-CHANNEL, GRAY
- 0201066 HARDWARE KIT
- 0262635 SCREW 8" X 1-1/4"/500 BOX

### Top Trim Mount: 11' 7.25"L

- 0200620 WHITE
- 0200621 PEBBLESTONE
- 0200622 GRAY
- 0200623 SAND
- 0200624 CAMEO


### Top Trim Front: 11' 7.25"L

- 0200609 WHITE
- 0200610 PEBBLESTONE
- 0200611 GRAY
- 0200612 SAND
- 0200613 CAMEO




PANEL: 0200407


SCREW: 0262635




GROUND CHANNEL  
0200401



4' HIGH CHANNEL  
0200406



TOP TRIM FRONT  
0200611 GRAY



TOP TRIM MOUNT  
0200622 GRAY



HARDWARE KIT  
0201066  
0262635 -SCREW ONLY

SEE VENTS ON PAGE 17.




White



Silver Gray



Desert Sand



## LIFESTYLE INSUL-SKIRTING

Energy savings year round!



- Vinyl Panel features unique wood-grain embossing.
- Panels are adhered to 2-inch thick EPS Foam providing R9 insulation value.
- Full size panels are 12' long by 47" wide.
- Available in White, Silver Gray & Desert Sand.
- Complete Rail System.

The Lifestyle Insul-Skirt is an insulated version of our Lifestyle Panel. It is available in 3 colors and when installed properly achieves an insulation factor of R-9.

### 4 X 12 PANELS

0200532 WHITE  
0200533 DESERT SAND  
0200534 SILVER GRAY

### TOP FRONT

0200541 WHITE  
0200542 DESERT SAND  
0200543 SILVER GRAY

### TRIM KITS

0200535 WHITE  
0200536 DESERT SAND  
0200537 SILVER GRAY

### GROUND CHANNEL

0200546 WHITE  
0200547 DESERT SAND  
0200548 SILVER GRAY

### TOP MOUNT

0200538 WHITE  
0200539 DESERT SAND  
0200540 SILVER GRAY



# INTRODUCING ONE OF THE LATEST INNOVATIONS IN FOUNDATION SYSTEMS!



ITEM ID	ITEM DESCRIPTION	SIZE	COLOR
0200700	RAPID WALL PANEL	4 X 12	WHITE
0200701	RAPID WALL TRIM KIT W/HARDWARE		WHITE
0200702	RAPID WALL FRONT RAIL		WHITE
0200703	RAPID WALL GROUND RAIL		WHITE
0200704	RAPID WALL BACK RAIL		WHITE
0200708	RAPID WALL PANEL	4 X 12	GRAY
0200709	RAPID WALL TRIM KIT W/HARDWARE		GRAY
0200710	RAPID WALL FRONT RAIL		GRAY
0200711	RAPID WALL GROUND RAIL		GRAY
0200712	RAPID WALL BACK RAIL		GRAY
0200716	RAPID WALL PANEL	4 X 12	ALMOND
0200717	RAPID WALL TRIM KIT W/HARDWARE		ALMOND
0200718	RAPID WALL FRONT RAIL		ALMOND
0200719	RAPID WALL GROUND RAIL		ALMOND
0200720	RAPID WALL BACK RAIL		ALMOND
0201072	HARDWARE F/ RAPID WALL SKIRTING		N/A

- Clean Concrete Foundation Like Appearance.
- Installs like traditional vinyl skirting. No special training required.
- 4 ft. wide panels mean fast installation.
- EPS foam backing gives the panel R8 insulating value.
- Foam backing stiffens the panel and can be installed without framework in most cases.
- No special tools required for installation.

RAPID WALL CALCULATION CHART										
SKIRTING PANELS REQUIRED										
TYPICAL HOME SIZE LINEAR FEET LESS HITCH	14 X 70	14 X 80	16 X 70	16 X 80	24 X 60	24 X 65	24 X 70	28 X 65	28 X 70	32 X 70
TO 24 INCHES	7	8	7	8	7	8	8	8	8	9
TO 28 INCHES	8	9	9	10	8	9	9	9	10	10
TO 36 INCHES	10	12	11	12	10	11	12	12	12	13
TRIM PARTS										
TOP FRONT RAIL	14	15	14	16	14	15	15	15	16	17
TOP BACK RAIL	14	15	14	16	14	15	15	15	16	17
GROUND CHANNEL	14	15	14	16	14	15	15	15	16	17
MIN # OF VENTS REQUIRED	10	10	10	10	12	12	14	14	16	18

SEE VENTS ON PAGE 17.

# PolyVulc POLYWALL PANELS

The PolyWall can allow a customized look to your home. Whether you prefer stucco, faux brick, or a simple latex paint application, the PolyWall system provides a solid surface for your desired application.



- Factor of safety of 3.0 applied to ultimate loads. Suitability of factor of safety for any specific purpose shall be reviewed and accepted by a registered design professional.
- Green Friendly - made of 100% recycled composite materials.
- Easy Installation – saves time and labor when compared to block.
- Stronger, lighter & more durable than concrete
- Self-supporting structural wall. No complicated rail system to install.
- Paintable, UV stable, lightweight
- Easy installation of vents. Multiple types of access doors can be used.

0204019 HARDWARE KIT  
 0204020 WALL PANEL  
 48" W X 40" H X 2" D  
 0204021 CORNER 48" W X 40" H X 2" D  
 0204019 HDW KIT  
 AXIAL STRENGTH (PLF): 1877  
 TRANSVERSE STRENGTH (PSF): 48.7  
 TRANSVERSE STIFFNESS (PSF/IN) 37.3

## ROCK FACE PANELS

Good-looking, cost-effective and practical. Formed of durable, deep-stamped galvanized metal that deflects wind, helps reduce heat loss and keeps your under-home storage areas dry and clean.

Easy and quick to install, virtually maintenance free! Lightweight, 28" x 59" panels may be installed with screws on a simple wooden frame.

If, at a later time, your home is to be moved, just unfasten the panels and take them with you.

0202200 28" X 60"

SEE VENTS ON PAGE 17.





## ADJUST-A-FRAME

- Durable aluminum support
- Adjustable: saves time
- Predrilled: saves time
- Insect resistant
- Rot resistant
- 24" centers
- 8' lengths
- Face mount or sill mount

0200830 36" X 8' (CUSTOM SIZES AVAILABLE BY SPECIAL ORDER)

0200832 STRAP 50/PK USED TO ATTACHED

0200831 3" X 97' FLAT BAR

## ADJUST-A-STUD

- Fast and easy intallation
- Works in a variety of positions
- Adjusts to proper height in seconds
- No sawing, measuring or toe nailing
- Automatically adjusts to freeze and thaw
- Prevents blow-offs
- Made of durable aluminum


Adjustable bracing support behind vinyl skirting. The top of the stud attaches to the rim of the home, while the bottom attaches to the ground with spikes or rebar. Design allows panels to be attached directly to the studs, which adjust with any ground movement.

0200825 24" - 40"

0200826 40" - 72"

0200831 FLAT BAR 3" X 97"

Not Stocked At All Locations



## ELIXIR CRAWLSPACE DOORS

Elixir Crawlspace Doors Feature:

- Rust Resistant Construction
- Removable Door for Easy Access
- Security from Intruders and Vermin
- Latching system allows for optional padlock
- Can be Mounted Flush or Recessed
- Aesthetically Appealing
- Safe and Easy to Handle
- Energy Efficiency



Frame and door fit securely into wall, and access is equally well designed.



ELIXIR CRAWLSPACE DOORS	
ITEM #	DIMENSIONS
0212300	24"W X 24"H
0212301	32"W X 24"H
0212302	32"W X 32"H



Plastic – No Rust or Rot Crawlspace Doors & Vents for Homes (New Construction & Replacement)

Easy Access • Modular Use • Can Be Painted  
Removable cover, louver and screen

## FLOOD VENTS

**CERTIFIED TO MEET FEMA FLOOD ZONE REQUIREMENTS – INCREASED NET FREE AIR SIZE – SAVE MONEY ON FLOOD INSURANCE!**


ITEM NO.	OPENING SIZES	NON ENG.	ENG.	NET-FREE AIR
0212310	12" X 20"	240	380	220
0212311	12" X 32"	384	610	353
0212312	16" X 16"	256	410	235
0212313	16" X 24"	384	610	353
0212314	16" X 32"	512	810	471
0212315	20" X 32"	640	1,020	589
0212316	24" X 24"	576	920	530
0212317	24" X 36"	864	1,380	795



## POLYCLIP

PolyVulc has pioneered the way for skirting attachments with the new PolyClip.

- Durable
- Doesn't degrade
- Made from 100% recycled materials
- Easily attaches to the rim joist of house
- Used for installation of skirting to vinyl sided houses to comply with HUD Code 3285.

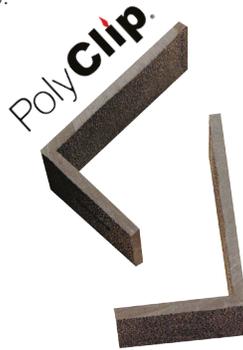


ITEM #	DESCRIPTION
0201075	POLYCLIPS®, BAG OF 50
ADDITIONAL SUPPLIES NEEDED	
0390608	6" BIT HOLDER
0263050	1/2" SHEET METAL SCREWS, BOX OF 500
0263102	1" SHEET METAL SCREWS, BOX OF 500
0263043	3/4" SELF TAP SCREWS, BOX OF 100

Innovation Through Recycling 100% Recycled Materials



## AUTOMATIC FOUNDATION VENTS

SAVES ENERGY!



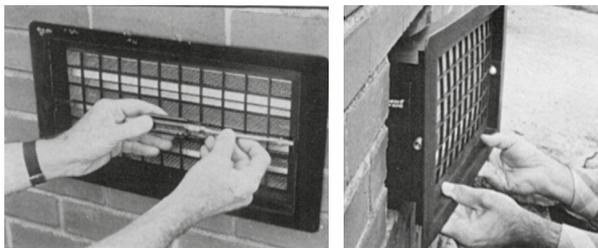


- Automatically opens at 70°, closes at 40°
- Bi-metal coil fully enclosed in patented protection
- High-density thermo plastic construction
- Stainless steel and corrosion resistant metal parts
- Heavy-duty aluminum mesh screen in front and back
- Fits standard 8" x 16" vent openings
- Limited lifetime warranty
- 65 sq. in. net free area

0421280 BLACK 0421281 GRAY  
0421282 BROWN 0421283 WHITE



## SKIRT-GUARD

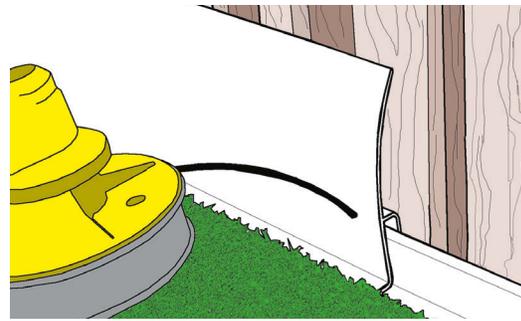

From this...

to this... in a snap!

Snaps right on to existing bottom track to hide and/or protect from string trimmer damage. UV protected vinyl is thicker and smoother than ordinary skirting with no edges for trimmer to catch on; even butt joints are smooth. Hides damage up to 4" high. Can be trimmed to bend to both outside and inside corners. Patented design keeps top edge snug -- will not blow out or collect debris. White color only.

0200900 7' SECTIONS, 30/BOX

## VENT WITH ADJUSTABLE DAMPER

Provides 72 sq. in. of air flow

0201137 DELUXE VENT W/DAMPER, BLACK



NOTE: To determine the number of vents needed: square footage divided by 150 = number of vents needed.



## OPEN VENT

Provides 72 sq. in. of air flow

0201125 UNIVERSAL VENT, BLACK  
0201108 UNIVERSAL VENT, SAND






## VINYL HITCH HIDER

Attractive and clever way to hide hitches. All vinyl, maintenance-free.  
Makes lots more attractive too.

0207850 8'  
0207851 10'


6' available by special order.



## STEEL PANELS

36" x 96"; Approx. 34" Face Coverage

0207804 COLONIAL WHITE  
0207806 WHITE  
0207809 RICH BROWN



## ALUMINUM SIDING PANELS


0207844 48" X 96" COLONIAL WHITE  
0207845 48" X 96" WHITE



## MINI GUTTER

14' Long


0207812 COLONIAL WHITE  
0207822 WHITE  
0207813 RICH BROWN



## OUTSIDE CORNER

96"; cedar embossed hem.


0207821 COLONIAL WHITE  
0207825 WHITE  
0207823 RICH BROWN



## MANSARD RECEIVER

14' Long


0207818 COLONIAL WHITE  
0207828 WHITE  
0207819 RICH BROWN



## BOTTOM STARTER

14' Long


0207810 COLONIAL WHITE  
0207820 WHITE  
0207811 RICH BROWN



## DIVIDER BAR

14' Long


0207814 COLONIAL WHITE  
0207824 WHITE  
0207815 RICH BROWN



## J-RAIL


12' Long

0207816 COLONIAL WHITE  
0207826 WHITE





**ELIXIR**  
**INDUSTRIES**  
SINCE 1948

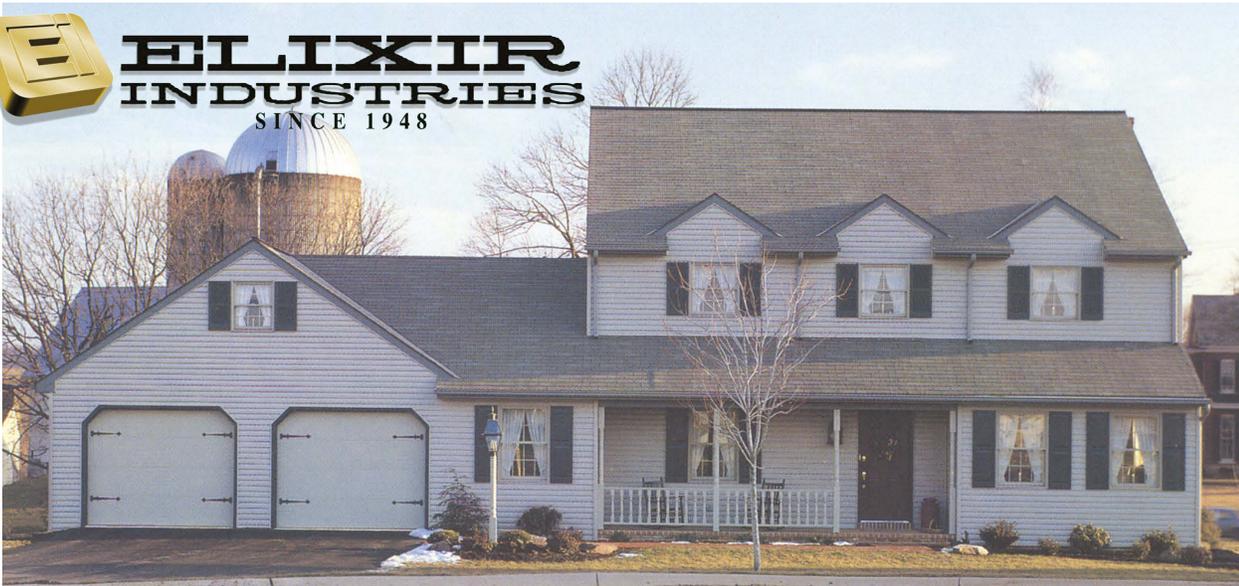

## PREMIUM DUTCH LAP VINYL SIDING

A home could be the largest investment many people will make. With that being said, it is important for the home owner to invest in products that will preserve the appearance of the home. Adding Elixir vinyl siding is just the product for that task. Our vinyl will help maintain that needed “curb appeal” and will also help protect the value of the homeowner’s investment.

Produced in Tuscumbia, Alabama - our vinyl siding is held up to the most ardent quality standards. Our siding product is engineered for longevity and carries a 50 year warranty. It won't dent, rust, peel, chip, fade, blister, pit or warp. Elixir vinyl siding is virtually maintenance free.

### Vinyl Siding Color Chart

Standard Colors



Special Order Colors



	WHITE	CLAY	GRAY	COL. WHITE
D4.5 DUTCHLAP SIDING	0207951	0207952	0207953	
1/2" J-CHANNEL	0207960	0207961	0207962	
3/4" J-CHANNEL	0207967	0207968	0207969	
5/8" J-CHANNEL	0207990	0207993	0207992	0207991
OUTSIDE CORNER, 10'	0207957	0207958	0207956	
D5 SOFFIT, VENTED	0207971	0207974	0207973	
D5 SOFFIT, SOLID	0207972			
WINDOW DOOR TRIM, 8'		0207955		
GALVANIZED STARTER STRIP		0207975		
PVC TRIM COIL	0207976			
UTILITY TRIM	0207977			
ALUM COLONIAL SIDING 48" BY 110"				0207954

*Not Stocked At All Locations*

### Dutch Lap Siding Advantages

#### Integrated Panel Locking System

Allows for secure no-hassle panel joining

#### Deep Embossing

A deep embossing provides for a uniform and rich texture

#### Sturdy Wall Thickness

#### Generous Lap Height

#### Consistent Color

Available in 100% virgin vinyl uniform color throughout

#### Soffit and Accessories Available



## SIDESWIPER®

Saves time!

Unique offset design makes work more accessible so you can work faster and safer. Wider body and comfortable vinyl-grip handle conforms to your hand, protects knuckles and gives you greater leverage and control when replacing siding panels. Durable one-piece, spring steel construction is virtually indestructible.



0381002 6/CTN.



### Using the SideSwiper

Wedge tip under the bottom end of overlapping panel and hook on the back lip of buttlock in one easy motion.

Pull downward on SideSwiper's® handle and slide row of siding panel to disengage lock and expose nail row of sliding panel to be replaced.

Use in the same manner to install replacement panel.

## METAL SHEARS

Drop-forged, heavy duty, 12-3/4" long.  
0381004



## SNAP-LOCK PUNCH TOOL

For vinyl and aluminum; 3/8" throat depth.  
0380104



## ALUMINUM HANDLED SNIPS

New design! Handle gives strength of steel with only half the weight. Straight cuts through the hardest sheet metal (even seams) and vinyl. Long-life pressure fit inset steel blades are easy to replace and extended tips reach all the way into corners. Larger handle loops accommodate gloves. 3" cut, weighs only 1 lb., 12" long.

0381012 M12N SNIPS

0381014 RPL. BLADE FOR M12N SNIPS





## WEATHERBEST AWNINGS

Constructed of tough ABS material, will not rot, dent, rattle, tear or fade. Side-ventilated to prevent heat build-up and wind resistance. Pre-drilled and pre-finished, all hardware included for easy installation. Maintenance free – just clean off with a garden hose. Available in white, brown or blue, can be painted.

To Order:  
Measure width of door or window, including trim and molding. Select the next larger size.

### Awnings

(DROP 24", PROJECTION 24")

- 0207725 36"
- 0207726 42"
- 0207727 48"

### Door Canopies

(DROP 16", PROJECTION 39-3/4")

- 0207730 63"



## ALL ALUMINUM DOOR CANOPY



Available in white canopy with white, tan or brown fascia. Made of durable aluminum with snow-white baked enamel finish, complete with rain gutter.

- 0207750 40" X 48" W/WHITE FASCIA
- 0207752 40" X 60" W/WHITE FASCIA
- SPECIAL ORDER 40" X 48" W/TAN FASCIA
- SPECIAL ORDER 40" X 60" W/TAN FASCIA



## WEATHERBEST WINDOW SHUTTERS

Molded shutters of high-impact polystyrene with realistic woodgrain texture. KORAD® finish will not crack, peel or chip. Sold in pairs. 5 pairs to master carton.



Not stocked at all locations  
Other colors & sizes available by special order

### 9" X 27.5"

- 0207600 BROWN
- 0207601 BLACK
- 0207602 WHITE
- 0207603 GREEN

### 9" X 41"

- 0207605 BROWN
- 0207606 BLACK
- 0207607 WHITE
- 0207608 GREEN

### 9" X 53"

- 0207610 BROWN
- 0207611 BLACK
- 0207612 WHITE
- 0207613 GREEN

### 12" X 31"

- 0207615 BROWN
- 0207616 BLACK
- 0207617 WHITE
- 0207618 GREEN

### 12" X 55"

- 0207620 BROWN
- 0207621 BLACK
- 0207622 WHITE
- 0207623 GREEN

### 12" X 63"

- 0207625 BROWN
- 0207626 BLACK
- 0207627 WHITE
- 0207628 GREEN

### 15" X 31"

- 0207630 BROWN
- 0207631 BLACK
- 0207632 WHITE
- 0207633 GREEN

### 15" X 55"

- 0207635 BROWN
- 0207636 BLACK
- 0207637 WHITE
- 0207638 GREEN

### 15" X 63"

- 0207640 BROWN
- 0207641 BLACK
- 0207642 WHITE
- 0207643 GREEN

# SUN HAVEN

## WINDOW & ENTRANCE AWNINGS




Special Order Only

Custom-manufactured to add beauty and privacy. Saves energy by keeping home cooler in the summer.

- Constructed of aluminum components, maintenance-free
- Standard roll form available in white, brown or tan
- Step-down style available in a wide variety of colors
- Factory pre-assembled for easy installation
- Standard with all hardware necessary for installation
- All aluminum support columns available in white, brown, black or tan
- Scallop available on closed end awnings in a wide variety of colors.

## ADJUSTABLE WINDOW AWNINGS




White baked-on enamel finish

0207801 WHITE 36" WIDTH-30" PROJECTION

0207802 WHITE 48" WIDTH-30" PROJECTION

0207803 WHITE 40" WIDTH-40" PROJECTION

## GALVANIZED ROOFING

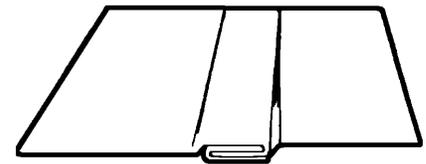

Replace the complete roof. Best certified steel, .125 mil thick.

Special Order Only

0207505 GALVANIZED ROOFING

## PATIO COVERS

- Designed and engineered for maximum strength using aluminum components
- Baked-on enamel finish for care-free maintenance
- Ridged roll-form outer frame with integrated gutter system
- Standard with all necessary installation hardware

### AVAILABLE OPTIONS:

- W-Pan, Flat Pan, 3" or 4" insulated
- Color-matched downspouts
- Heavy-duty aluminum columns available (scrolled, standard, 3" fluted, 3" heavy wall, rose or oak)
- Self-mating beams can be used for increased span and rigidity



0207704 10' X 20' WHITE (INCLUDES POSTS AND DOWN SPOUTS)

Other sizes available by special order.



Enclosures



Screened Room

## ENCLOSURES

- All aluminum sturdy construction frame work
- Baked-on enamel finish for care-free maintenance
- Available in 2" non-insulated, 2" poly-core or 4" insulated
- Kit form or pre-built
- Available in choice of tan or white design your enclosure to meet your special project needs
- Standard with all necessary installation hardware
- Enclosure walls are available with aluminum, vinyl or optional OSB to be custom finished

Special Order Only

## SCREEN ROOMS

- All aluminum sturdy construction
- Baked-on enamel finish for care-free maintenance
- Available in choice of white or tan
- Aluminum non-insulated kick panel standard
- 2" poly-core kick panel available with aluminum, vinyl or optional OSB to be custom finished
- Many options available to custom design your screen room to meet your special project needs
- Standard with all necessary installation hardware

Special Order Only



Attached single car carport



Attached double car carport

## ATTACHED AND FREE-STANDING CARPORTS

- Designed and engineered for maximum strength using aluminum components
- Ridged roll-form outer frame with integrated gutter system
- Permanent baked-on enamel finish
- Standard with all necessary installation hardware

Special Order Only

Available Options:

- W-Pan, Flat Pan, 3" or 4" insulated
- Color-matched downspouts
- Heavy-duty aluminum columns available (scrolled, standard, 3" fluted, rose, oak or 3" heavy wall for free-standing applications)
- Self-mating beams can be used for increased span and rigidity

\*Please note: Special orders are manufactured to your specifications, so the final product may not look exactly like the pictures shown here.

## INSULATED OVER-ROOFS

SUN HAVEN over-roofs eliminate summer heat build-up, winter heat loss, constant recoating, unsightly water streaks, expansion leaks, condensation in roof and noises caused by weather.

- Constructed with .024 aluminum panels
- Manufactured to fit any structure
- Includes installation hardware
- All maintenance-free aluminum components

Special Order Only



## SUN-TEK SKYLIGHTS

If you're looking for an economical and durable skylight, the insulated Sun-Tek PolyDome Series is for you.

- The PolyDome Series is made with G.E Lexan® Resin.
- PolyDome Skylights are 30 times more impact resistant than acrylic skylights and 250 times more impact resistant than glass.
- Sun-Tek PolyDome Skylights are UV stabilized for long lasting protection.
- Polycarbonate skylights resist temperature extremes from a frigid -60° below zero to an oven baking +250° degrees.
- SF models carry a 5 year warranty.



### PolyDome SF Skylights

Finish size is 1/2" smaller

- 0463009 14" X 22"
- 0463010 14" X 30"
- 0463014 14" X 14"
- 0463015 14" X 46"
- 0463011 22" X 22"
- 0463012 22" X 30"
- 0463016 22" X 46"
- 0463013 46" X 46"



### Sapphire SF Skylights

Finish size is 1/2" smaller

- 0463000 14" X 30"
- 0463004 14" X 14"
- 0463005 14" X 46"
- 0463001 22" X 22"
- 0463002 22" X 30"
- 0463006 22" X 46"
- 0463003 46" X 46"

### Skylight Sealant

0110390 SEALANT




\*Please note: Special orders are manufactured to your specifications, so the final product may not look exactly like the pictures shown here.

# PRESSURE TREATED STEPS

These sturdy pine-treaded steps, attached to a super-strong, cross-braced metal frame, offer attractive access to any mobile home at an economical price. Step tread on the 29" wide step is 9-1/2" wide. On the 36" wide step, the tread is 11-1/2" wide.

## TWO STEP



0350901 18" H; 12/CTN.  
0350902 HAND RAIL; 5/CTN.

## THREE STEP



0351001 26" H X 29" W; 12/CTN.  
0351002 RAIL FOR 0351001; 5/CTN.  
0351005 26" H X 36" W  
0351006 RAIL FOR 0351005

## FOUR STEP



0351101 34" H X 29" W  
0351004 RAIL FOR 29" 4 STEP; 5/CTN.  
0351007 34" H X 36" W; 12/CTN.\*  
0351008 RAIL FOR 36" 4 STEP

\*The 36" wide not available at all locations.




## STEPS WITH HALF PLATFORM & RAIL

Two steps with the third step being a 19" x 29" half platform with rail for safety.

0351050 10/CTN.

Three steps with the fourth step being a 19" x 29" half platform with rail for safety.

0351052 10/CTN.

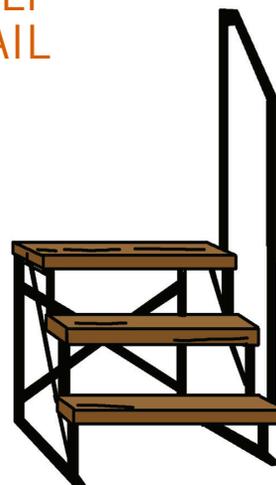


## HALF PLATFORM & RAIL KIT

Platform and rail attaches easily to steps for an attractive addition.

0351056 19" D X 29" W FOR 4-STEP  
0351057 24" D X 36" W FOR 3-STEP  
0351058 24" D X 36" W FOR 4-STEP  
0351055 19" D X 29" W FOR 3-STEP

(Shown with three step: NOT included)

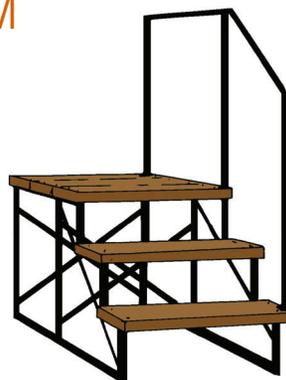

Colors are only approximations. See your sales rep for actual samples.

**HOME PRIDE**  
**Fiberglass Steps**

- Steps constructed of heavy-duty treated plywood and 2 x 4's designed to last decades even under heavy water contact.
- Deep-penetrating treatment protects all exterior and interior wood against rotting, warping and other decay.
- Grooved nails give superior strength in key bracing areas.
- Fiberglass and resin exterior coating provides strength and durability.
- White or sand exterior with special "Black Buckshot" finish for added visual appeal.
- Slip-resistant texture on all treads and landings for additional safety.



STANDARD STEP SIZES (ENCLOSED BACK)				FOR USE WITH THESE RAILS:			
SAND STEPS	WHITE STEPS	DESCRIPTION	SIDE RAIL	BOCA SIDE RAIL	STANDARD BACK RAIL	BOCA BACK RAIL	
		H = HEIGHT; D = DEPTH; W = WIDTH					
0352291	0351291	2-STEP 15.5"H X 38"D X 38"W	0351292	0350087	0351357	0350069	
0352054	0350054	3-STEP 23.25"H X 24"D X 38"W	0351348	0350068	0351357	0350069	
0352053	0350053	3-STEP 23.25"H X 38"D X 38"W	0351342	0350067	0351357	0350069	
0352055	0350055	3-STEP 23.25"H X 38"D X 48"W	0351342	0350067	0351354	0350154	
0352056	0350056	4-STEP 28"H X 24"D X 38"W	0350078	0350158	0351357	0350069	
0352052	0350052	4-STEP 27.5"H X 38"D X 38"W	0350075	0350085	0351357	0350069	
0352063	0350063	4-STEP 27.5"H X 38"D X 48"W	0350075	0350085	0351354	0350154	
0352058	0350058	4-STEP 32"H X 24"D X 38"W	0351366	0350159	0351357	0350069	
0352059	0350059	4-STEP 31"H X 38"D X 38"W	0351365	0350086	0351357	0350069	
0352057	0350057	4-STEP 31"H X 38"D X 48"W	0351365	0350086	0351354	0350154	
	0350064	4-STEP 31"H X 48"D X 48"W		0350088		0350154	
0352060	0350060	4-STEP 31"H X 38"D X 72"W	0351365	0350086			
0352180	0350180	5-STEP 36"H X 38"D X 38"W	0350190	0350161	0351357	0350069	
0352061	0350061	5-STEP 35"H X 38"D X 48"W	0350190	0350161	0351354	0350154	
0352050	0350050	5-STEP 40"H X 24"D X 38"W	0351367	0350162	0351357	0350069	
0352051	0350051	5-STEP 38.75"H X 38"D X 38"W	0351368	0350163	0351357	0350069	
0352062	0350062	5-STEP 38.75"H X 38"D X 48"W	0351368	0350163	0351354	0350154	
0352047	0350047	6-STEP 46.5"H X 38"D X 38"W		0350168	0351357	0350069	
0352046	0350046	6-STEP 46.5"H X 38"D X 48"W		0350168	0351354	0350154	
ECONOMY STEP SIZES							
0352290	0351290	2-STEP 15.5"H X 38"D X 38"W	0351292	0350087	0351357	0350069	
0352333	0351333	3-STEP 24"H X 20"D X 34"W	0351369	0350150			
0352318	0351318	4-STEP 28"H X 20"D X 34"W	0351370	0350090	0351360		
0352303	0351303	4-STEP 28"H X 24"D X 38"W	0350078	0350158	0351357	0350069	
	0351300	4-STEP 27.5"H X 38"D X 38"W	0350075	0350085	0351357	0350069	
0352321	0351321	4-STEP 32"H X 20"D X 34"W	0351351	0350152	0351360		
0352312	0351312	4-STEP 32"H X 24"D X 38"W	0351366	0350159	0351357	0350069	
0352315	0351315	4-STEP 31"H X 38"D X 38"W	0351365	0350086	0351357	0350069	
0352327	0351327	4-STEP 31"H X 38"D X 48"W	0351365	0350086	0351354	0350154	
	0351328	4-STEP 35"H X 24"D X 34"W	0351352	0350084			
0351326		5-STEP 36"H X 24"D X 38"W	0350165		0351357		
0352325	0351325	5-STEP 35"H X 38"D X 48"W	0350190	0350161	0351354	0350154	
0352339	0351339	5-STEP 40"H X 24"D X 38"W	0351367	0350162	0351357	0350069	
0352324	0351324	5-STEP 38.75"H X 38"D X 38"W	0351368	0350163	0351357	0350069	
0352340	0351340	5-STEP 38.75"H X 38"D X 48"W	0351368	0350163	0351354	0350154	

H = HEIGHT OF STEP    D = DEPTH OF TOP LANDING    W = WIDTH OF STEP    BOCA RAIL = MEETS BOCA CODE